

PRODUCT DATA SHEET

Sika Waterbar®-940

(formerly MSeal 940)

Centrally and externally placed PVC Waterstops

DESCRIPTION

Sika Waterbar®-940 is a range of centrally placed and externally placed PVC Waterstops extruded from high grade PVC compound.

USES

Sika Waterbar®-940 is designed to provide a complete sealing network for expansion and contraction/ construction joints in water retaining and water excluding in-situ concrete structures. The profiles are supplied in straight lengths to be butt jointed on site. Factory made intersections are available for complex junctions.

- Canals/ culverts
- Water tanks
- Reservoirs
- Dams
- Sewerage Treatment Plants
- Liquid retaining vessels
- All cast in-situ concrete structures to retain or exclude water

FEATURES

- Permanent flexibility
- Homogeneous waterbar
- Suitable for low to medium levels of hydrostatic water pressure
- Resistant to all natural mediums in soil and groundwater
- Robust products designed for handling and installation on site
- Suitable for thermal welding on site

CERTIFICATES AND TEST REPORTS

- ASTM D 412 (Tensile/ Elongation)

PRODUCT INFORMATION

Composition	PVC-P (plasticized)		
Packaging	Standard Profile:	Width (mm)	Roll size
	IEJ (Internal Expansion Joints)	150 , 200 and 250	15 m
	ICJ (Internal Construction / Contraction Joints)	150 , 200 and 250	15 m
	EEJ (External Expansion Joints)	150 , 200 and 250	15 m
	ECJ (External Construction / Contraction Joints)	150 , 200 and 250	15 m
	Special profile with 10 mm thick:		
	ICJ/X	250	10 m
	IEJ/X	250	10 m
	EEJ/X	250	10 m
	ECJ/X	250	10 m
	<ul style="list-style-type: none"> ▪ 320 mm and 350 mm special size available for some profiles, please contact Sika representative. ▪ For detailed shape and illustration of waterbar options, please refer to General Method Statement. 		
Colour	Blue or Yellow		
Shelf life	Up to 60 months from date of production.		
Storage conditions	Store in undamaged, unopened, original sealed packaging in dry conditions at temperatures between +5°C and +35°C. Protect from direct sunlight, heat and moisture.		

TECHNICAL INFORMATION

Shore A hardness	80- 85	(ASTM D2240)
Tensile strength	~15 N/mm ²	(ASTM D412)
Elongation at break	~300 %	(ASTM D412)






APPLICATION INFORMATION

Ambient air temperature	+5°C min. / +35°C max.
--------------------------------	------------------------

SYSTEM INFORMATION













System structure

Sika Waterbar®-940 - Internal / External - Construction / Expansion Joints

Application	Name	Description	Illustration
Internal Expansion Joints	Sika Waterbar®-940 IEJ	Expansion bulb sections principally for expansion joints but can be used for construction / contraction joints. With reinforced eyeleted fixing flanges for wiring the waterstop to surrounding rebar.	 o eyelet
Internal Construction / Contraction Joints	Sika Waterbar®-940 ICJ	Plain web sections for construction / contraction joints, also with reinforced eyeleted flanges and grout check fins to prevent grout loss from formwork.	 o eyelet
External Expansion Joints	Sika Waterbar®-940 EEJ	Sections have a flat top, wedged expansion box for positive anchorage and good seating of joint fillers. EEJ sections can also be used in construction / contraction joints. The bottom web in the expansion box is thinned to cater for excessive subsidence or seismic movement should it occur	
External Construction / Contraction Joints	Sika Waterbar®-940 ECJ	Sections are plain web incorporating grout check fins to prevent grout loss at formwork	
Special Profile Internal / External Construction / Expansion Joints	Sika Waterbar®-940 250 IEJ/X 250 EEJ/X 250 ECJ/X	Are 10 mm thick web profiles for applications where there is high water pressure or head of water in excess of 70 m. Both profiles include reinforced eyeleted fixing flanges	 o eyelet
IEJ, ICJ available in standard sizes of 150 mm, 200 mm, 250 mm, 320 mm and special size of 350 mm (made-to-order)			
EEJ, ECJ available in standard sizes of 150 mm, 200 mm & 250 mm			

Intersection Pieces / Junctions:

Standard factory produced welded intersections are available for all Sika Waterbar®-940 profiles as detailed below:

Application	Product Names	Illustrations	
Horizontal – flat miters	Sika Waterbar®-942 IEJ Sika Waterbar®-942 EEJ Sika Waterbar®-942 ICJ Sika Waterbar®-942 ECJ		
Vertical – edge miters	Sika Waterbar®-942 IEJ V Sika Waterbar®-942 EEJ V Sika Waterbar®-942 ICJ V Sika Waterbar®-942 ECJ V		
Horizontal – flat 3way section	Sika Waterbar®-943 IEJ Sika Waterbar®-943 EEJ Sika Waterbar®-943 ICJ Sika Waterbar®-943 ECJ		
Vertical - 3way section	Sika Waterbar®-943 IEJ V Sika Waterbar®-943 EEJ V Sika Waterbar®-943 ICJ V Sika Waterbar®-943 ECJ V		
Horizontal - flat 4way joint	Sika MultiSeal®-944 IEJ Sika MultiSeal®-944 EEJ Sika MultiSeal®-944 ICJ Sika MultiSeal®-944 ECJ		
Vertical - 4way section	Sika MultiSeal®-944 IEJ V Sika MultiSeal®-944 ICJ V		

BASIS OF PRODUCT DATA

All technical data stated in this Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

FURTHER DOCUMENTATION

General Method Statement (GMS)

IMPORTANT CONSIDERATIONS

SIZE OF WATERSTOP

- The choice of width of profile is mainly governed by slab/ wall thickness, position of reinforcing steel and aggregate size.
- As a general rule, the 250mm width profiles are appropriate for slab/ wall thickness over 250mm, allowing good compaction and width of barrier to water penetration.
- For concrete members less than 250 mm the use of a smaller profile approximating to the actual slab or wall thickness will be appropriate.

COMPOSITE INTERSECTIONS

- These are required when a change from horizontal to vertical occurs in the same type of joint i.e. from slab expansion to wall expansion joint or slab contraction to wall contraction joint EEJ to IEJ ECJ to ICJ.
- If a composite edge mitre is needed, simply cut off one of the horizontal legs.

ECOLOGY, HEALTH AND SAFETY

This product is an article as defined in article 3 of regulation (EC) No 1907/2006 (REACH). It contains no substances which are intended to be released from the article under normal or reasonably foreseeable conditions of use. A safety data sheet following article 31 of the same regulation is not needed to bring the product to the market, to transport or to use it. For safe use follow the instructions given in the product data sheet. Based on our current knowledge, this product does not contain SVHC (substances of very high concern) as listed in Annex XIV of the REACH regulation or on the candidate list published by the European Chemicals Agency in concentrations above 0,1 % (w/w).


APPLICATION INSTRUCTIONS

EQUIPMENT

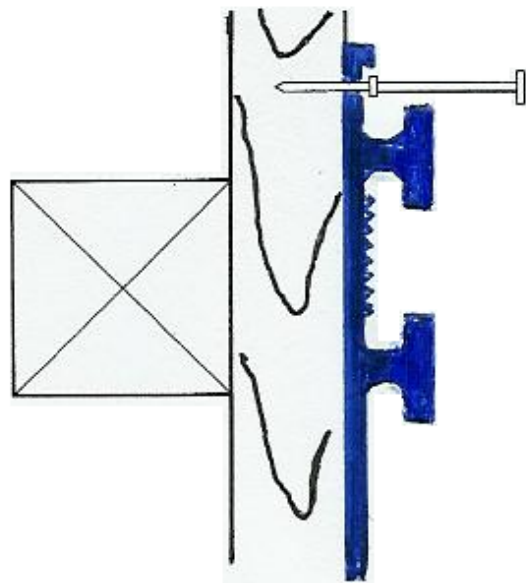
- Heat welding equipment is required to enable site jointing to be carried out efficiently.
- Ensure that the mating surfaces of the waterstop are accurately aligned while the heater blade heats the waterstop to the necessary temperature for jointing.

APPLICATION

- Sika Waterbar®-940 ICJ & IEJ profiles must be installed so they are securely held in the correct position whilst the concrete is poured.
- The concrete must be fully and properly compacted around the waterstops.
- Where reinforcement is present, an adequate clearance must be left between this and all waterstops to permit proper compaction of the concrete.
- The eyelets in the reinforced flanges of the ICJ and IEJ profiles allow them to be wired to the surrounding reinforcing steel. The eyelets are an integral part of the profiles and being placed outside the outer valves cannot create a water path around the profile or impair the efficiency in performance in any way. See typical detail below.



- Sika Waterbar®-940 ECJ & EEJ profiles when used on ground slab blinding concrete where a permanent, firm and stable support is given usually require no fixing.
- The profile is simply laid centrally over the line of the joint to be formed.
- Fixing to vertical shuttering is simplified by nailing with double headed nails through the outer reinforced flange to provide a firm fixing as shown below.



HEAT WELDING OF WATERSTOPS

- Make sure that the heater blade is clean, plug it into the correct voltage electricity supply and leave in a safe position to warm up.
- Ensure that the ends of the waterstop to be jointed are of the same width and profile; clean them with water and dry them.
- Clamp them in the correct profile slots of the jig provided and cut both ends off square with a sharp knife, flush with the faces of the jig.
- Note: An allowance must be made for waste and for the 5 to 10 mm that will be taken up by melting when calculating the length of waterstop required.
- Loosen the jig and slide them back so that approximately 10 mm of each waterstop end projects and then clamp the jig tightly in position.
- Position the heater blade on the bars between the jigs and slide them together until the waterstop ends are pressed firmly against the sides of the blade. The PVC should melt without burning or charring. Hold the jig firmly in position until a bead of molten PVC approximately 3 mm in diameter appears along either side of the heater blade.
- Slide the jig apart a little and remove the heater blade with an upward movement. This will ensure that it takes as little PVC as possible with it. Quickly joint the molten ends by sliding the jig together and exerting pressure. Approximately 20 seconds to allow the molten PVC to fuse completely. Switch off the heater blade. While it is still hot, clean thoroughly with emery paper or a wire brush ready for the next joint. Unclamp the jig and carefully remove the waterstop. Do not flex the joint until it has cooled. The joint is now complete. When cold, test it by flexing the waterstop several times.

LOCAL RESTRICTIONS

Note that as a result of specific local regulations the declared data and recommended uses for this product may vary from country to country. Consult the local Product Data Sheet for exact product data and uses.

LEGAL NOTES

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

Sika Gulf B.S.C. (c)

Tel: +973 177 38188

Email: info@bh.sika.com

Sika Kuwait Cons. Mat. & Paints Co WLL

Tel: +965 22 282 296

Email: sika.kuwait@kw.sika.com

Web: gcc.sika.com

Sika UAE LLC

Sika MB Construction Chemicals LLC

Sika International Chemicals LLC

Tel: +971 4 439 8200

Email: info@ae.sika.com

Web: gcc.sika.com

Sika Saudi Arabia Limited

Sika Construction Chemicals for

Manufacturing LLC

Riyadh / Jeddah / Dammam / Rabigh

Tel: +966 9200 22167

Email: info@sa.sika.com

Web: gcc.sika.com

Sika LLC - Oman

Sika MB LLC

Tel. +968 22 826 500

Email: info@om.sika.com

Web: gcc.sika.com



ISO 9001, 14001, 45001 – SGS
Sika MB LLC
Sika International Chemicals LLC
Sika Gulf B.S.C. (c)
ISO 9001, 14001 – SGS
Sika Saudi Arabia Limited
ISO 9001, 14001 – TÜV
Sika MB Construction Chemicals LLC
Sika Construction Chemicals for Manufacturing LLC
ISO 9001 – LMS
Sika MB LLC

All products are supplied under a management system certified to conform to the requirements of the quality, environmental and occupational health & safety standards ISO 9001, ISO 14001 and ISO 45001.



Product Data Sheet

Sika Waterbar®-940

January 2025, Version 06.01

020703000000002008