

SYSTEM DATA SHEET

SikaRoof® MTC-22

HIGH PERFORMANCE, UV-STABLE LIQUID APPLIED POLYURETHANE ROOF WATER-PROOFING SYSTEM



DESCRIPTION

SikaRoof® MTC-22 is a cold-applied, seamless, highly elastic and UV-stable moisture triggered polyurethane roof waterproofing system consisting of Sikalastic®-601 BC, Sika® Reemat Premium and Sikalastic®-621 TC. Suitable for use in hot and tropical climatic conditions.

USES

SikaRoof® MTC-22 may only be used by experienced professionals.

SikaRoof® MTC-22 can be used as following:

- Roof waterproofing solution for new construction and refurbishment projects
- For roofs displaying complex detail areas and geometry, even when accessibility is limited
- For cost efficient life cycle extension of failing roofs
- In combination with Sikalastic®-621 TC – SR (traffic white RAL 9016) for cool roofs and solar roofs

CHARACTERISTICS / ADVANTAGES

- Proven technology - over 25 year track record
- One component - no mixing, easy and ready to use
- UV resistant - Highly reflective (RAL 9016) and resistant to yellowing
- Cold applied - requires no heat or flame
- Seamless roof waterproofing membrane
- Compatible with Sika® Reemat Standard - easy to detail
- Fast curing - free from resin damage almost immediately on application
- High elastic and crack-bridging - retains flexibility even at low temperatures
- High root resistance
- Easily re-coated when needed - no stripping required
- Good adhesion to most substrates - see primer chart
- Vapour permeable - allows substrate to breathe
- Strong resistance to common atmospheric chemicals


APPROVALS / CERTIFICATES

- Liquid applied roof waterproofing kit according to ETAG 005, ETA-09/0139 issued by technical assessment body British Board of Agrément (BBA), Declaration of Performance 75346978, provided with the CE marking
- Root resistance according to FLL
- External fire performance: B_{Roof}(t1)
- Reaction to fire according to EN 13501-1: Euroclass E

SYSTEMS

System Structure

Sikalastic®-601 BC applied in 1 coat, reinforced with Sika® Reemat Premium and sealed with 2 coats Sikalastic®-621 TC

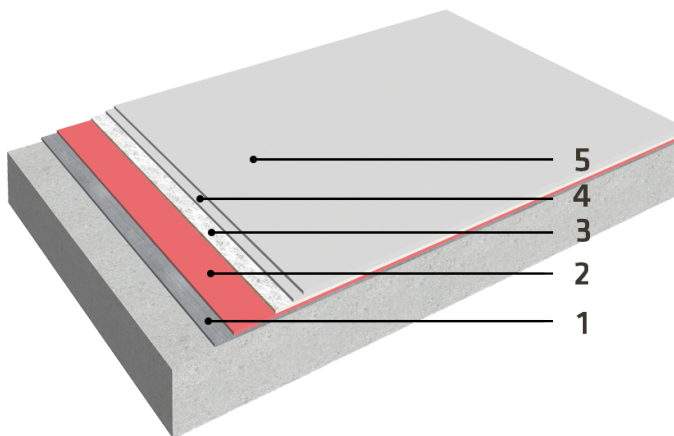

Layer	Product	Consumption
1. Primer	Please refer to substrate pre-treatment	Please refer to PDS of the Primer
2. Base coat	Sikalastic®-601 BC	≥ 1.0 l/m ² (≥ 1.4 kg/m ²)
3. Reinforcement	Sika® Reemat Premium	-
4. Top coat	Sikalastic®-621 TC	≥ 0.8 l/m ² (≥ 1.15 kg/m ²)
5. Top coat	Sikalastic®-621 TC	≥ 0.8 l/m ² (≥ 1.15 kg/m ²)

Note: These figures are theoretical and do not include for any additional material required due to surface porosity, surface profile, variations in level and wastage.

Composition	Moisture-triggered aliphatic polyurethane
Colour	Sikalastic®-601 BC: Oxide red (RAL 3011) Sikalastic®-621 TC: Slate grey (RAL 7015), shale grey (RAL 8500), traffic white (RAL 9016), other colours available upon request
Dry film thickness	~2.2 mm

TECHNICAL INFORMATION

Tensile Strength	~11.0 N/mm ²	(EN ISO 527-3)
Elongation at Break	~84 %	(EN ISO 527-3)
Tear Strength	~52 N/mm ²	(EN ISO 6383-1:2004)
Permeability to Water Vapour	μ: ~4 700	(EN ISO 1931 Method B)
Water Vapour Transmission	~3.8 g/m ² /day	(EN ISO 1931 Method B)
External Fire Performance	B _{Roof} (t1), B _{Roof} (t2), B _{Roof} (t3), B _{Roof} (t4)	(EN 13501-5)
Reaction to Fire	Euroclass E	(EN 13501-1)
Chemical Resistance	Salt spray	1000 h continuous exposure (ASTM B117)
	Prohesion testing	1000 h cyclic exposure (ASTM G85-94: Annex A5)

Strong resistance to a wide range of reagents including paraffin, petrol, fuel oil, white spirit, acid rain, detergents and moderate solutions of acids and alkalis. Some low molecular weight alcohols can soften the material. Contact Sika Technical Department for specific information.

Solar Reflectance Index

≥ 109*

(ASTM 1980)

* All values refer to the initial (properly cured, non-weathered) status of Sikalastic®-621 TC white (RAL 9016).

Service Temperature

-30 °C min. / +80 °C max.

APPLICATION INFORMATION**Ambient Air Temperature**

+5 °C min. / +35 °C max.

Relative Air Humidity

5 % r.h. min. / 85 % r.h. max.

Substrate Temperature+5 °C min. / +60 °C max.
≥ 3 °C above dew point**Substrate Moisture Content**≤ 4 % pbw moisture content.
Test method: Sika®-Tramex meter
No rising moisture according to ASTM (Polyethylene-sheet).**Substrate Pre-Treatment**

Substrate	Primer
Cementitious substrates	Sika® Concrete Primer or Sika® Bonding Primer
Brick & Stone	Sika® Concrete Primer or Sika® Bonding Primer
Ceramic tiles (unglazed), and concrete slabs	Sika® Concrete Primer or Sika® Bonding Primer
Bituminous felt & coating	Normally not required Sikalastic® Metal Primer*
Metals Ferrous or galvanised metals, lead, copper, aluminium, brass or stainless steel	Sikalastic® Metal Primer
Wooden substrates	Timber based roof decks require a complete layer of Sikalastic® Carrier. For small exposed timber sections: Sika® Concrete Primer or Sika® Bonding Primer
Paints & Coatings	Subject to adhesion and compatibility tests
Existing Sikalastic® MTC System	Sika® Reactivation Primer
Single ply membranes	Consult Sika Technical Department

*Sikalastic® Metal Primer prevents migration of bituminous volatiles and improves long-term reflectivity. For the consumption rates and waiting time / overcoating you please refer to the Product Data Sheet of the appropriate cleaner and primer. Other substrates must be tested for their compatibility. If in doubt, apply a test area first.

Waiting Time / Overcoating

Ambient conditions	Minimum waiting time
+5 °C / 50 % r.h.	18 h
+10 °C / 50 % r.h.	8 h
+20 °C / 50 % r.h.	6 h

After four days the surface must be cleaned and primed with Sika® Reactivation Primer before continuing.

Note: Times are approximate and will be affected by changing ambient conditions particularly temperature and relative humidity.

Applied Product Ready for Use

Ambient conditions	Rain resistance	Touch dry	Full cure
+5 °C / 50 % r.h.	10 min*	8 – 12 h	16 – 24 h
+10 °C / 50 % r.h.	10 min*	4 h	8 – 12 h
+20 °C / 50 % r.h.	10 min*	3 h	6 – 8 h

* Be aware that impact of heavy rain or rain showers can physically damage the still liquid membrane.

Note: Times are approximate and will be affected by changing ambient conditions particularly temperature and relative humidity.

PRODUCT INFORMATION

Packaging	Please refer to individual Product Data Sheet
Shelf life	Please refer to individual Product Data Sheet
Storage conditions	Please refer to individual Product Data Sheet

APPLICATION INSTRUCTIONS

SUBSTRATE PREPARATION

The surface must be sound, of sufficient strength, clean, dry and free of dirt, oil, grease and other contamination. Depending on the material the substrate must be primed or mechanically cleaned. Grinding may be necessary to level the surface. Suitable substrates are such as: concrete, bituminous felts and coatings, metal, brickwork, asbestos cement, ceramic tiles, wooden substrates.

For detailed information regarding substrate preparation and primer chart please refer to Method Statement.

MIXING

Mixing is not required, however if the product is settled or separated on opening, stir gently but thoroughly in order to achieve a uniform colour. Stirring gently will minimise air entrainment.

APPLICATION

Prior the application of SikaRoof® MTC-22 the priming coat if used must have cured tack-free. For the Waiting Time / Overcoating please refer to the Product Data Sheet of the appropriate primer. Damageable areas (handrails etc.) have to be protected with tape or plastic wrapping.

Please note, always begin with details prior to the installation of the horizontal surface.

1. Apply first coat of Sikalastic®-601 BC. Work only so far in advance that the material stays liquid
2. Roll in the Sikalastic® Reemat. Overlap the Reemat a minimum 5 centimetre and ensure overlaps are sufficiently wet to bond both layers. The roller may require only a little extra material to keep wetted but no further significant material needs to be added at this stage.
3. After the coat is dry enough to walk on, seal the roof area with second coat of Sikalastic®-621 TC.
4. For SikaRoof® MTC-22 a third coat of Sikalastic®-621 TC has to be applied.

CLEANING OF EQUIPMENT

Clean all tools and application equipment with Thinner S immediately after use. Hardened and/or cured material can only be removed mechanically.

FURTHER INFORMATION

For detailed information regarding substrate preparation, primer chart and application method of SikaRoof® MTC-22 refer to Method Statement.

IMPORTANT CONSIDERATIONS

- Do not apply SikaRoof® MTC on substrates with rising moisture.
- SikaRoof® MTC is not suitable for permanent water immersion.
- On substrates likely to exhibit outgassing, apply during falling ambient and substrate temperature. If applied during rising temperatures “pin holing” may occur from rising air.
- Do not dilute Sikalastic®-601 BC & Sikalastic®-621 TC with any solvent.
- Do not use SikaRoof® MTC for indoor applications.
- Do not apply close to the air intake vent of a running air conditioning unit.
- Do not apply SikaRoof® MTC directly on insulation boards. Instead use Sikalastic® Carrier between Insulation board and SikaRoof® MTC.
- Volatile bituminous materials may stain and or soften below the coating.
- Areas with high movement, irregular substrates, or timber based roof decks require a complete layer of Sikalastic® Carrier.
- Do not apply cementitious products (example: tile mortar) directly onto SikaRoof® MTC.

BASIS OF PRODUCT DATA

All technical data stated in this Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

LOCAL RESTRICTIONS

Note that as a result of specific local regulations the declared data and recommended uses for this product may vary from country to country. Consult the local Product Data Sheet for the exact product data and uses.

ECOLOGY, HEALTH AND SAFETY

For information and advice on the safe handling, storage and disposal of chemical products, users shall refer to the most recent Safety Data Sheet (SDS) containing physical, ecological, toxicological and other safety-related data.

LEGAL NOTES

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

SIKA NORTHERN GULF

Bahrain / Qatar / Kuwait
Tel: +973 177 38188
sika.gulf@bh.sika.com
gcc.sika.com

SIKA SOUTHERN GULF

UAE / Oman / SIC
Tel: +971 4 439 8200
info@ae.sika.com
gcc.sika.com

SIKA SAUDI ARABIA

Riyadh / Jeddah / Damman
Tel: +966 11 217 6532
info@sa.sika.com
gcc.sika.com



ISO 9001: Sika UAE LLC,
Sika Gulf B.S.C. (c),
Sika Saudi Arabia Co. Ltd,
Sika Qatar LLC
ISO 14001: Sika UAE LLC,
Sika Gulf B.S.C. (c),
Sika Saudi Arabia Co. Ltd
OHSAS: Sika UAE LLC,
Sika Gulf B.S.C. (c)

All products are supplied
under a management
system certified to conform
to the requirements of the
quality, environmental and
occupational health &
safety standards ISO 9001,
ISO 14001 and OHSAS
18001.

System Data Sheet
SikaRoof® MTC-22
October 2016, Version 02.01
020915909000000004

SikaRoofMTC-22-en-AE-(10-2016)-2-1.pdf

