

SYSTEM DATA SHEET

Sikafloor® MultiDur ET-56 ESD

Textured conductive epoxy ESD flooring system

DESCRIPTION

Sikafloor® MultiDur ET-56 ESD is an ESD epoxy flooring system with a slip resistant textured finish. The system is designed to dissipate electrostatic charges (ESD) and protect sensitive equipment in electrostatic protected areas (EPA).

USES

Sikafloor® MultiDur ET-56 ESD may only be used by experienced professionals.

The System can be used in industrial buildings such as:

- Automotive facilities
- Electronic facilities and data centres
- Pharmaceutical facilities

Please note:

- The System may only be used for interior applications.

FEATURES

- Provides reliable and long lasting ESD protection
- Good resistance to specific chemicals
- Electrostatically conductive
- Very good mechanical resistance
- Low VOC emissions
- Low Airborne Molecular Contaminants (AMC) emissions
- Textured gloss finish


CERTIFICATES AND TEST REPORTS

- Fire Classification Report EN 13501-1, GHENT, No. CR 21-0906-01

SYSTEM INFORMATION

System structure

Sikafloor® MultiDur ET-56 ESD

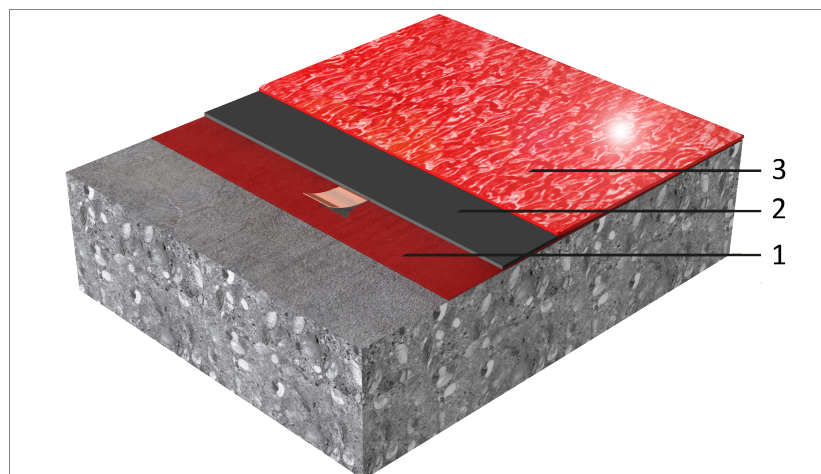

Layer	Product
1. Primer	Sikafloor®-151 or, Sikafloor®-161
Earthing connection	Sikafloor® Conductive Set
2. Conductive primer	Sikafloor®-220 W Conductive
3. Conductive wearing layer	Sikafloor®-2350 ESD + Sika® Ex- tender T

Composition	Epoxy
Colour	Available in the approximate colours: RAL 1014, RAL 5009, RAL 5012, RAL 5024, RAL 6010, RAL 6021, RAL 6027, RAL 7001, RAL 7005, RAL 7011, RAL 7015, RAL 7016, RAL 7024, RAL 7030, RAL 7032, RAL 7034, RAL 7035, RAL 7036, RAL 7037, RAL 7038, RAL 7039, RAL 7040, RAL 7042, RAL 7043, RAL 7045, RAL 7047, RAL 9002, RAL 9005. Contact Sika representative for available local colour options.
Nominal thickness	~1 mm

TECHNICAL INFORMATION

Chemical resistance	Sikafloor®-2350 ESD provides the chemical resistance. Refer to Product Data Sheet.	
Electrostatic behaviour	Resistance to ground	$R_G < 10^9 \Omega$ (IEC 61340-4-1)
	Typical average resistance to ground	$R_G < 10^5-10^6 \Omega$
	Body voltage generation	$< 100 \text{ V}$ (IEC 61340-4-5)
	System resistance	$R_G < 10^9 \Omega$
<p>Note: Measurement results can be affected by ESD clothing, ambient conditions, measurement equipment, cleanliness of the floor and the test personnel.</p> <p>IMPORTANT</p> <p>ESD footwear requirements</p> <p>The ESD shoes used in the EPA must have a resistance of $< 5 \text{ MOhm}$ according to IEC 61340-4-3 at climate class 1 (12 % relative humidity / $+23 \text{ }^\circ\text{C}$). In order to achieve charges of $< 30 \text{ volts}$ of human body charge during the walking test (at 12 % relative humidity / $+23 \text{ }^\circ\text{C}$), we recommend using the following ESD shoes: Weeger ESD clog, art. 48512-30, www.schuhweeger.de.</p>		
Service temperature	Short-term, maximum 12 hours	$+60 \text{ }^\circ\text{C}$
<p>IMPORTANT</p> <p>No simultaneous mechanical and chemical strain</p> <p>While the product is exposed to temperatures up to $+60 \text{ }^\circ\text{C}$, do not also subject it to either chemical or mechanical strain, as it may cause damage to the product.</p>		

APPLICATION INFORMATION

Consumption	Layer	Product	Consumption											
	Primer or scratch coat	Sikafloor®-151 Sikafloor®-161	~0.3–0.5 kg/m ²											
	Earthing connection	Sikafloor® Conductive Set	1 earthing point per ~200 m ² to 300 m ² . Min 2 per room											
	Conductive primer	Sikafloor®-220 W Conductive	1 × 0.08–0.10 kg/m ²											
	Conductive wearing layer	Sikafloor®-2350 ESD + Sika® Extender T	~0.8–1.0 kg/m ² + 1.5–2 % (by weight)											
<p>Note: Consumption data is theoretical and does not allow for any additional material due to surface porosity, surface profile, variations in level, wastage or any other variations. Apply product to a test area to calculate the exact consumption for the specific substrate conditions and proposed application equipment.</p>														
Ambient air temperature	Maximum	+30 °C												
	Minimum	+15 °C												
Relative air humidity	Maximum	80 %												
Dew point	Refer to the individual Product Data Sheet.													
Substrate temperature	Minimum	+15 °C												
	Maximum	+30 °C												
Substrate moisture content	Refer to the individual Product Data Sheet.													
Waiting time to overcoating	For the waiting time to overcoating of the primer, refer to the individual Product Data Sheet.													
	Before applying Sikafloor®-2350 ESD on Sikafloor®-220 W Conductive, allow: <table border="1" data-bbox="608 1093 1434 1218"> <thead> <tr> <th>Temperature</th> <th>Minimum</th> <th>Maximum</th> </tr> </thead> <tbody> <tr> <td>+15 °C</td> <td>26 hours</td> <td>7 days</td> </tr> <tr> <td>+20 °C</td> <td>17 hours</td> <td>5 days</td> </tr> <tr> <td>+30 °C</td> <td>12 hours</td> <td>4 days</td> </tr> </tbody> </table>			Temperature	Minimum	Maximum	+15 °C	26 hours	7 days	+20 °C	17 hours	5 days	+30 °C	12 hours
Temperature	Minimum	Maximum												
+15 °C	26 hours	7 days												
+20 °C	17 hours	5 days												
+30 °C	12 hours	4 days												
<p>Note: Times are approximate and will be affected by changing ambient conditions, particularly temperature and relative humidity.</p>														
Applied product ready for use	Temperature	Foot traffic	Light traffic	Full cure										
	+15 °C	~48 hours	~3 days	~7 days										
	+20 °C	~24 hours	~48 hours	~4 days										
	+30 °C	~16 hours	~36 hours	~3 days										
<p>Note: Times apply when the last layer of the system has been applied. Times are affected by changing ambient conditions, particularly temperature and relative humidity.</p>														

BASIS OF PRODUCT DATA

All technical data stated in this Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

FURTHER DOCUMENTATION

- Sika Method Statement: Evaluation and preparation of surfaces for flooring systems
- Sika Method Statement: Mixing & Application of Flooring Systems
- Sika Method Statement: Sikafloor® MultiDur ET-56 ESD

ECOLOGY, HEALTH AND SAFETY

User must read the most recent corresponding Safety Data Sheets (SDS) before using any products. The SDS provides information and advice on the safe handling, storage and disposal of chemical products and contains physical, ecological, toxicological and other safety-related data.

APPLICATION INSTRUCTIONS

APPLICATION

Refer to Sika Method Statement.

ESD CONDUCTIVITY MEASUREMENTS

Recommended number of conductivity measurements is specified in the following table:

Ready applied area	Number of measurements
< 10 m ²	6
≥ 10 m ² and < 100 m ²	10 to 20
≥ 100 m ² and < 1000 m ²	50
≥ 1000 m ² and < 5000 m ²	100

If the measurements yield values that are outside of the agreed specification, follow these steps:

1. Carry out one additional measurement within a radius of approximately 30 cm around the original measuring point.

If the value of the new measurement meets the agreed specification, the original measurement can be disregarded. If the value of the new measurement does not meet the agreed specification, you may repeat the measurement described above, until the fulfilment of the requirements have been verified. If the requirements cannot be verified, contact Sika technical services.

INSTALLATION OF EARTHING POINTS

Refer to Sika Method Statement: Mixing & Application of Flooring Systems.

Number of earthing connections per room: Minimum of 2 earthing connections. The optimum number of earthing connections depends on the local conditions and must be specified on drawings or other contract documentation.

LOCAL RESTRICTIONS

Note that as a result of specific local regulations the declared data and recommended uses for this product may vary from country to country. Consult the local Product Data Sheet for exact product data and uses.

LEGAL NOTES

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

Sika Gulf B.S.C. (c)

Tel: +973 177 38188

Email: info@bh.sika.com

Sika Kuwait Cons. Mat. & Paints Co WLL

Tel: +965 22 282 296

Email: sika.kuwait@kw.sika.com

Web: gcc.sika.com

Sika UAE LLC

Sika UAE LLC (Branch)

Sika International Chemicals LLC

Tel: +971 4 439 8200

Email: info@ae.sika.com

Web: gcc.sika.com

Sika Saudi Arabia Limited

Riyadh / Jeddah / Dammam / Rabigh

Tel: +966 9200 22167

Email: info@sa.sika.com

Web: gcc.sika.com

Sika MB LLC

Oman

Tel: +968 22 826 500

Email: info@om.sika.com

Web: gcc.sika.com



ISO 9001, 14001, 45001 – SGS:
- Sika UAE LLC
- Sika International Chemicals LLC
- Sika Gulf B.S.C. (c)
ISO 9001, 14001 – SGS:
- Sika Saudi Arabia Limited
ISO 9001, 14001 – TÜV:
- Sika UAE LLC (Branch)
ISO 9001 – SGS:
- Sika MB LLC

All products are supplied under a management system certified to conform to the requirements of the quality, environmental and occupational health & safety standards ISO 9001, ISO 14001 and ISO 45001.



System Data Sheet

Sikafloor® MultiDur ET-56 ESD

April 2026, Version 09.01

020811900000000192