

PRODUCT DATA SHEET

Sikasil® WS-302 ME

Silicone weatherproofing sealant

TYPICAL PRODUCT DATA

Chemical base	1-component silicone
Color (CQP001-1)	Translucent
Density (uncured)	0.98 kg/l
Application temperature	+5 °C to +40 °C
Skin time (CQP019-1)	15 minutes ^A
Tack free time (CQP019-3)	70 minutes ^A
Curing speed (CQP049-1)	(see diagram)
Shore A hardness (CQP023-1 / ISO 48-4)	25
Tensile strength (CQP036-1 / ISO 527)	0.4 Mpa
Elongation at break (CQP036-1 / ISO 527)	400 %
Service temperature	-40 °C to +150 °C
Shelf life	12 months ^B

CQP = Corporate Quality Procedure

A) 23 °C / 50 % r. h.

B) storage below 25 °C

DESCRIPTION

Sikasil® WS-302 ME is a durable, neutral-curing silicone sealant with good adhesion to a wide range of substrates. It is particularly suited as a sealant for shop fronts, glass partition walls and other applications.

PRODUCT BENEFITS

- Very good weathering resistance
- ASTM C 920, class 25
- Very good workability
- Neutral cure
- VOC test report (US EPA 24)
- VOC Emission Test Report (CDPH)

AREAS OF APPLICATION

Sikasil® WS-302 ME can be used for weatherproofing and sealing applications where durability under severe conditions is required. It is particularly suited as a sealant for shop fronts, glass partition walls and other applications. This product is suitable for experienced professional users only. Tests with actual substrates and conditions have to be performed ensuring adhesion and material compatibility.

CURE MECHANISM

Sikasil® WS-302 ME cures by reaction with atmospheric moisture. At low temperatures the water content of the air is generally lower and the curing reaction proceeds somewhat slower (see diagram 1).

The curing speed of the reaction depends mainly on the relative humidity and temperature. Material temperature above 50 °C could lead to bubble formation and has to be avoided.

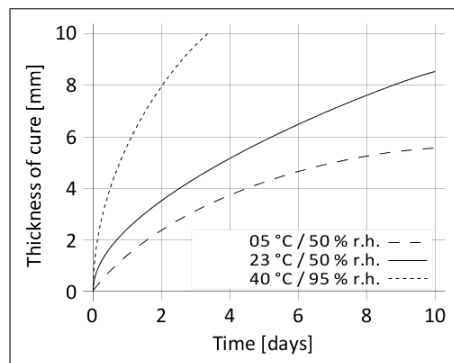


Diagram 1: curing speed Sikasil® WS-302 ME

METHOD OF APPLICATION

Surface preparation

Surfaces must be clean, dry and free from grease, oil and dust. Surface treatment depends on the specific nature of the substrates and is crucial for a long lasting bond.

Application

Sikasil® WS-302 ME can be processed with manual, pneumatic or electric driven piston guns as well as pump equipment. For advice on selecting and setting up a suitable pump system, contact the System Engineering Department of Sika Industry. For optimum performance the joint width needs to be designed according to the movement capability of the sealant based on the actual expected movement. The minimum joint depth is 6 mm and a width / depth ratio of minimum 2 : 1 and maximum 4 : 1 must be respected. Joints deeper than 15 mm must be avoided.

For backfilling it is recommended to use closed cell, sealant compatible foam backer rods e.g. high resilience polyethylene foam rod. If joints are too shallow for backing material to be employed, we recommend using a polyethylene tape. This acts as a release film (bond breaker), allowing the joint to move and the silicone to stretch freely.

Tooling and finishing

Tooling and finishing must be carried out within the skin time of the sealant or adhesive. When tooling freshly applied Sikasil® WS-302 ME press the adhesive to the joint flanks to get a good wetting of the bonding surface. No tooling agents to be used.

Removal

Uncured Sikasil® WS-302 ME may be removed from tools and equipment with Sika® Remover-208 or another suitable solvent. Once cured, the material can only be removed mechanically.

Hands and exposed skin have to be washed immediately using hand wipes such as Sika® Cleaner-350H or a suitable industrial hand cleaner and water.

Do not use solvents on skin.

Overpainting

Sikasil® WS-302 ME cannot be overpainted.

Application limits

The optimum temperature for substrate and sealant is between 15 °C and 25 °C.

Sikasil® WS-302 ME can be processed with manual, pneumatic or electric driven piston guns.

To exclude materials influencing Sikasil® WS-302 ME, all materials such as gaskets, tapes, setting blocks, sealants, etc., in direct and indirect contact have to be approved by Sika in advance.

Where two or more different reactive sealants are used, allow the first to cure completely before applying the next one. Sikasil® WS-302 ME may only be used in combination with structural glazing applications after a detailed examination of the corresponding project details.

Do not use Sikasil® WS-302 ME on PMMA and PC elements as it may cause environmental stress cracking (crazing).

FURTHER INFORMATION

The information herein is offered for general guidance only. Advice on specific applications is available on request from the Technical Department of Sika Industry.

Copies of the following publications are available on request:

- Safety Data Sheets
- General Guideline Sikasil® Weather Sealants

PACKAGING INFORMATION

Cartridge	300 ml
Unipack	600 ml
Drum	200 l

BASIS OF PRODUCT DATA

All technical data stated in this document are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

HEALTH AND SAFETY INFORMATION

For information and advice regarding transportation, handling, storage and disposal of chemical products, users shall refer to the actual Safety Data Sheets containing physical, ecological, toxicological and other safety-related data.

DISCLAIMER

The information, and, in particular, the recommendations relating to the application and enduse of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

PRODUCT DATA SHEET

Sikasil® WS-302 ME
Version 01.01 (10 - 2025), en_AE
012603203330246483

Sika UAE L.L.C
P.O.Box 126212
Dubai
United Arab Emirates
Tel: +971 4 439 8200 Fax: +971 4 439 3606
info@ae.sika.com
gcc.sika.com

