

## PRODUCT DATA SHEET

# Sikaflex® EasyFix

Automotive Glass Replacement polyurethane adhesive

**TYPICAL PRODUCT DATA (FURTHER VALUES SEE SAFETY DATA SHEET)**

|                                                               |                                     |
|---------------------------------------------------------------|-------------------------------------|
| Chemical base                                                 | 1-component polyurethane            |
| Color (CQP001-1)                                              | Black                               |
| Cure mechanism                                                | Moisture-curing                     |
| Density (uncured)                                             | 1.30 kg/l                           |
| Non-sag properties (CQP061-1)                                 | Good                                |
| Application temperature                                       | ambient, product 5 – 40 °C          |
| Skin time (CQP019-1)                                          | 45 minutes <sup>A</sup>             |
| Curing speed (CQP049-1)                                       | See diagram 1                       |
| Shore A hardness (CQP023-1 / ISO 48-4)                        | 55                                  |
| Tensile strength (CQP036-1 / ISO 527)                         | 5.5 MPa                             |
| Elongation at break (CQP036-1 / ISO 527)                      | 500 %                               |
| Tensile lap-shear strength (CQP046-1 / ISO 4587)              | 4.9 MPa                             |
| Minimum Drive Away Time (cars) according FMVSS 212 (CQP511-1) | with airbag 4 hours <sup>A, B</sup> |
| Shelf life                                                    | 12 months <sup>C</sup>              |

CQP = Corporate Quality Procedure

<sup>A)</sup> 23 °C / 50 % r. h.<sup>B)</sup> details about MDAT, contact Sika<sup>C)</sup> stored below 25 °C
**DESCRIPTION**

Sikaflex® EasyFix is an Automotive glass replacement adhesive with very good application properties.

The Product combines a 4-hour Minimum Drive-Away Time (MDAT) with a long skin time, facilitating robust and safe application under elevated temperature conditions.

**PRODUCT BENEFITS**

- 4 hours Minimum Drive-Away Time
- Easy to extrude with manual dispenser
- Good bead stability and non-sag properties
- Compatible with Sika's All Black- and Clear Aktivator Installation process

**AREAS OF APPLICATION**

Sikaflex® EasyFix is suitable for experienced professional users only.

This product and related process information is designed for Automotive Glass Replacement. For other applications, tests with actual substrates and conditions have to be performed ensuring adhesion and material compatibility.

**PRODUCT DATA SHEET**

Sikaflex® EasyFix

Version 01.01 (07 - 2026), en\_AE

012001263330248069

## CURE MECHANISM

Sikaflex® EasyFix cures by reaction with atmospheric moisture. At low temperatures the water content of the air is generally lower and the curing reaction proceeds somewhat slower (see diagram 1).

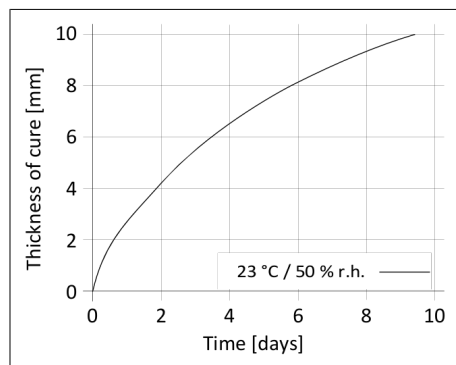


Diagram 1: Curing speed Sikaflex® EasyFix

## CHEMICAL RESISTANCE

Sikaflex® EasyFix is generally resistant to fresh water, seawater, diluted acids and diluted caustic solutions; temporarily resistant to fuels, mineral oils, vegetable and animal fats and oils; not resistant to organic acids, glycolic alcohol, concentrated mineral acids and caustic solutions or solvents.

## METHOD OF APPLICATION

### Surface preparation

Surfaces must be clean, dry and free from grease, oil, dust and contaminants.

The bond faces must be treated according to Sika's Clear Aktivator- or All Black Primer installation process. Further information on the application and use of Pre-treatments, can be found in the corresponding Product Data Sheet.

Glass without ceramic coatings need proper UV protection.

### Application

Sikaflex® EasyFix can be processed between 5 °C and 40 °C (climate and product) but changes in reactivity and application properties have to be considered. The optimum temperature for substrate and adhesive is between 15 °C and 25 °C.

It is recommended to apply Sikaflex® EasyFix with a battery operated or air powered piston-type dispenser. Sikaflex® EasyFix can also be applied with good quality manual dispenser.

Consider that the viscosity will increase at low temperature. For easy application, condition the adhesive at ambient temperature prior to use.

To ensure a uniform thickness of the bond-line it is recommended to apply the adhesive in form of a triangular bead (see figure 1).

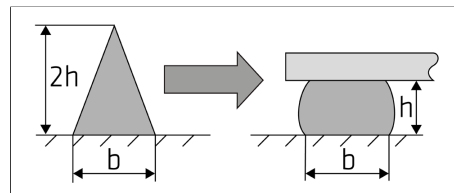


Figure 1: Recommended bead configuration

The open time is significantly shorter in hot and humid climate. The glass must always be installed within the open time. Never install a glass after the adhesive has built a skin.

### Removal

Uncured Sikaflex® EasyFix can be removed from tools and equipment with Sika® Remover-208 or another suitable solvent.

Once cured, the material can only be removed mechanically. Hands and exposed skin have to be washed immediately using hand wipes such as Sika® Cleaner-350H or a suitable industrial hand cleaner and water.

Do not use solvents on skin.

## FURTHER INFORMATION

The information herein is offered for general guidance only. Advice on specific applications is available on request from the Technical Department of Sika Industry.

Copies of the following publications are available on request:

- Safety Data Sheets
- Clear Aktivator Process Auto Glass Replacement Installation Guideline
- All Black Primer Process Auto Glass Replacement Installation Guideline
- Brochure: Auto Glass Replacement Safety Without Compromise

## PACKAGING INFORMATION

|           |        |
|-----------|--------|
| Cartridge | 300 ml |
| Unipack   | 600 ml |

## BASIS OF PRODUCT DATA

All technical data stated in this document are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

## HEALTH AND SAFETY INFORMATION

For information and advice regarding transportation, handling, storage and disposal of chemical products, users shall refer to the actual Safety Data Sheets containing physical, ecological, toxicological and other safety-related data.

## DISCLAIMER

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

## PRODUCT DATA SHEET

Sikaflex® EasyFix  
Version 01.01 (07 - 2026), en\_AE  
012001263330248069

Sika UAE L.L.C  
P.O.Box 126212  
Dubai  
United Arab Emirates  
Tel: +971 4 439 8200 Fax: +971 4 439 3606  
info@ae.sika.com  
gcc.sika.com

